

## marmoleum modular textura

### Natural design flooring

Marmoleum is well known for its features; versatility, durability and sustainability. Making Marmoleum Modular is a co-creation with nature. We combine natural ingredients and process them with our expertise. The main raw materials used for Marmoleum Modular are; linseed oil, woodflour, rosin, limestone and pigments.

Adding tactility by using embossing bears a wonderful opportunity to play with the subtle shadows of floodlight. By working with tiles you not only can play with direction of light, but you can also make the embossing structure come to life. It enhances the comfortable and familiar feel to natural surroundings.

- Plank collection of natural designed Marmoleum
- A natural floor covering, made from renewable natural resources
- PVC free
- Easy to install plank size
- Extremely durable
- Easy to clean with its Topshield2 finish

For more Forbo Flooring Marmoleum collections please visit [www.forbo-flooring.com/marmoleum](http://www.forbo-flooring.com/marmoleum)

5225 | 3573

## Technical specifications

Marmoleum Modular textura meets the requirements of EN-ISO 24011



	Total thickness	EN-ISO 24346	2,5 mm
	Domestic: heavy	EN-ISO 10874	Class 23
	Commercial: very heavy	EN-ISO 10874	Class 34
	Light Industrial: heavy	EN-ISO 10874	Class 43
	Dimensions (length x width)	EN-ISO 24342	100 x 25 cm
	Squareness and straightness	EN-ISO 24342	≤ 0,35 mm
	Residual indentation Typical value	EN-ISO 24343-1	≤ 0,15 mm ~0,05
	Castor chair continuous use	EN 425 (ISO 4918)	Suitable for office chairs with castors
	Light fastness	EN-ISO 105-802	Method 3: blue scale minimum 6
	Resistance to chemicals	EN-ISO 26987	Resistant to diluted acids, oils, fats and to conventional solvents. Not resistant to prolonged exposure to alkalis
	Bacteriostatic properties		Marmoleum has natural bacteriostatic properties, which are confirmed by independent laboratories, even against the bacteria MRSA
	Cigarette resistance	EN 1399	There is no melting of the surface by cigarettes. Marks left on linoleum as a result of stubbed-out cigarettes can be removed
	Slip resistance	DIN 51130	R9
	Acoustical impact sound reduction	EN ISO 717-2	≤ 5 dB
	Life Cycle Assessment		LCA is the foundation for securing the lowest environmental impact

Marmoleum meets the requirements of EN 14041

	Reaction to fire	EN 13501-1	C <sub>s</sub> s1
	Slip resistance	EN 13893	DS: ≥ 0,30
	Body voltage	EN 1815	< 2 kV
	Thermal conductivity	EN 12524	0,17 W/m·K

All Forbo Flooring Systems' sales organisations worldwide have a certified Quality Management System in accordance with ISO 9001. All Forbo Flooring Systems' manufacturing operations have a certified Environmental Management System in accordance with ISO 14001. The Life Cycle Assessment (LCA) of Forbo Flooring Systems' products is documented in individual Environmental Product Declarations (EPDs) which can be found on all of our websites.



### Australia

Forbo Flooring Systems  
23 Ormsby Place  
Wetherill Park, NSW 2164  
Tel: 1800 224 471  
Fax: 1800 662 566  
E-mail: [info.au@forbo.com](mailto:info.au@forbo.com)  
[www.forbo-flooring.co.au](http://www.forbo-flooring.co.au)

### New Zealand

Forbo Flooring Systems  
PO BOX 32022 Maungaraki  
Lower Hutt 5050 Auckland  
Tel: 0800 000 563  
Fax: 0800 000 634  
E-mail: [info.nz@forbo.com](mailto:info.nz@forbo.com)  
[www.forbo-flooring.co.nz](http://www.forbo-flooring.co.nz)

### Ireland

Forbo Ireland Ltd.  
2 Deansgrange Business Park  
Blackrock, Co Dublin  
Tel: 00353 1 2898 898  
Fax: 00353 1 2898 177  
[info.ireland@forbo.com](mailto:info.ireland@forbo.com)  
[www.forbo-flooring.ie](http://www.forbo-flooring.ie)

### South East Asia

Forbo Flooring Systems (South East Asia)  
190 Middle Road, #19-05 Fortune Centre  
Singapore 188979  
Singapore  
Tel: + 65 6852 9805  
Fax: + 65 6759 9212  
E-mail: [info.flooring.sg@forbo.com](mailto:info.flooring.sg@forbo.com)  
[www.forbo-flooring.com](http://www.forbo-flooring.com)

### Turkey

Forbo Flooring Systems TR  
ITower Plaza,  
Bomonti Ar Sokak No: 3 D: 60  
Bomonti 34381  
Sijli – Istanbul  
Tel: +90 212 809 03 16  
Fax: +90 212 809 03 18  
[info.flooring.tr@forbo.com](mailto:info.flooring.tr@forbo.com)  
[www.forbo-flooring.com/tr](http://www.forbo-flooring.com/tr)

### Other countries

Forbo Flooring B.V.  
PO Box 13  
1560 AA Krommenie  
The Netherlands  
Tel: +31 75 647 74 77  
Fax: +31 75 647 77 01  
E-mail: [contact@forbo.com](mailto:contact@forbo.com)  
[www.forbo-flooring.com](http://www.forbo-flooring.com)


Find us on



creating better environments

**forbo**

FLOORING SYSTEMS

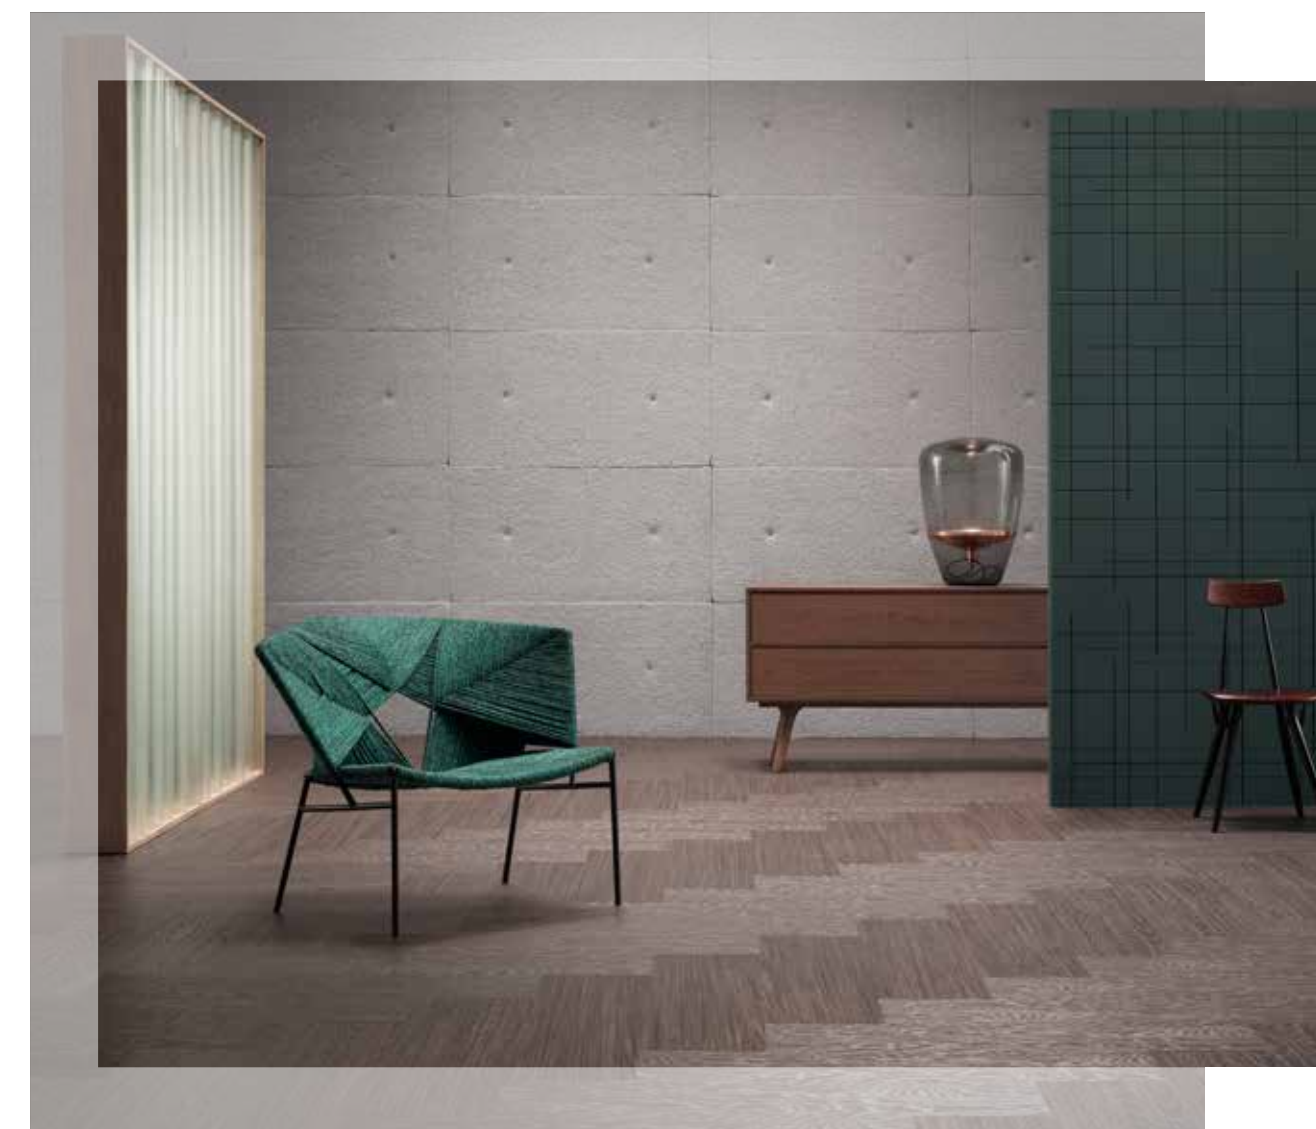

**marmoleum® modular** textura

creating better environments

**forbo**

FLOORING SYSTEMS

183062/04/2016





te5218



te5230 | white wash LRV 49%  
100 x 25 cm NCS S 2010 - Y30R



te5235 | North Sea coast LRV 32%  
100 x 25 cm NCS S 4010 - Y30R



te5217 | withered prairie LRV 23%  
100 x 25 cm NCS S 5010 - Y30R




te5225 | compressed time LRV 34%  
100 x 25 cm NCS S 4010 - Y30R



te3573 | trace of nature LRV 27%  
100 x 25 cm NCS 5005 - Y20R



te5231 | Cliffs of Moher LRV 17%  
100 x 25 cm NCS S 6005 - Y20R



te3573



te5217



te5229 | fresh walnut LRV 15%  
100 x 25 cm NCS S 6020 - Y50R



te5218 | Welsh moor LRV 8%  
100 x 25 cm NCS S 8005 - Y80R



te3573