
ACCESSORIES FOR ROMANE EVO



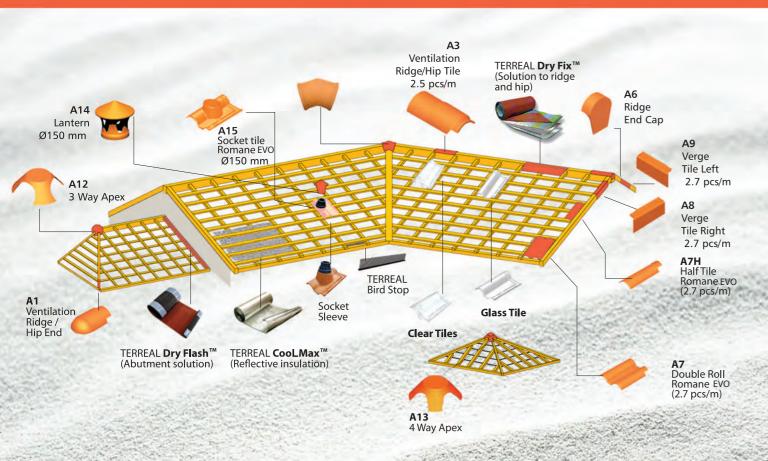

THE SECRET TO BEAUTIFUL HOME: **TBF CLAY ROOF TILES**

DURABLE

COOLING

STYLISH

EXCLUSIVE







TERREAL MALAYSIA SDN BHD (202237-P) No. 39 & 41-1, Jalan TPK 2/8, Taman Perindustrian Kinrara, Seksyen 2, 47180 Puchong, Selangor Darul Ehsan. T • (603) 8075 4010 / 4020 / 4060 **F** • (603) 8075 1090

E • tbf_kl@terreal.com.my

Dealer's Stamp



WHY CHOOSE CLAY MATERIAL?

You can enjoy all the advantages of clay tiles over alternative roofing materials

Clay tiles have been around for centuries proving their long lasting and durability attributes. But there are many other benefits that have stamped clay tiles as the best roofing material. So many products have come and go after claiming to be worthwhile replacements for clay tiles.

Terreal clay roof tiles are produced using the best quality clay that is natural and environmentally friendly. Manufactured with a permanent finish that is fired onto the surface of the clay, Terreal uses fire temperature of 1060°C which is 150% to 200% above what is commonly used in the industry. This results in clay tiles that offer superb colour durability which prevents the tiles from fading, chalking, curling, flaking and spalling, lasting for decades to come. With a low moisture absorption rate that prevents the tiles from aging, vibrant colours are still maintained up to as long as 50 years.

ROMANE EVO is a natural thermal mass insulator, keeping the heat outside. The best way to illustrate this is to think of clay tiles as energy savers. Cooling is the largest energy consumption in an average house under tropical climate. We can reduce the need for artificial cooling by harnessing natural energy and incorporating thermal mass into your sustainable design with ROMANE EVO. ROMANE EVO also provide natural sound insulation.

UNPARALLALED PRODUCT QUALITY, BACKED BY A UNIQUE 10 YEARS PRODUCT WARRANTY

- State of the art production facilities, located in Kluang, that was just modernized in 2008 using all latest european equipments to ensure highest quality performance
- · Peace of mind given by our 10 years warranty, based on SS70 Singapore Quality standards, Quality Management System (ISO 9001 : 2008), Malaysia SIRIM certification and SIRIM ECO Label

OUR BEST SELLER ROOF TILES BECOME EVEN BETTER A proven profile with high performance and cost benefits

A proven Romane profile, installed for more than 20 years in Asia, our innovative **ROMANE EVO** was optimized in Terreal Group Research and Development Center for Easy Installation and Perfect Watertightness.

Decades of uninterrupted success have made the Romane TBF tiles a reliable and well tested reference among roof tiles. The best selling ROMANE EVO roof tiles once again impress us with its improved proven profile that comes with higher performance and more cost benefits.

Featuring higher installation tolerance, this series requires lesser tiles per square metre, thus lowering installation costs. This tiles and its fittings have also been designed for easy and economical dry-laying. With its pure lines and powerful streamlined curves complemented by a rich colour range, ROMANE EVO beautifully complements both modern and traditional buildings.

ROMANE EVO

Aesthetically Superior

With our wide range of color choices and finishes combined with contemporary tiles profile can be utilised to create the desires roofing effect.

Long Lasting Color

TBF clay roof tiles are fired at extremely high temperatures ensuring our clay tiles will not fade, rust or corrode. Unlike other roofing products, clay tiles are extremely low maintenance. Our finishes will last forever

Exclusive

TBF Clay roof tiles are the roofing material of choice, when it comes to high-end housing and quality. Give your home that exclusive beautiful outlook only with TBF Clay Roof Tiles.

Cooler Temperature

As clay acts as highly effective thermal insulator

Quiet Roof

As clay tiles provide natural sound insulation under heavy rainfall

Double Interlocking & Double Overlapping System

High performance weatherproof design, with advanced Double Interlocking and Double Overlapping System. At the same time, its interlocking and nailing systems provide strong security to your home.

TECHNICAL SPECIFICATION					
Demension (mm)	Batten Gauge (mm)	Effective Width (mm)	Tile per m ²	Weight per m² (Kg)	Minimum Pitch*
282 x 428	368 ± 6	220	12	45.6	19 °
* Depending on location and wind speed					