




EcoWorx® Performance Broadloom



backing system	EcoWorx Performance Broadloom
backing description	100% thermoplastic polyolefin compound with a high performance precoat and a reinforcing layer
backing process	3-step process 1. High performance precoat for maximum tuft bind 2. Thermoplastic laminate for superior delamination strength 3. Woven reinforcing layer for stability
primary	Synthetic
stabilizer	Woven reinforcing layer
weight	1322g/m ² (9 oz/yd ²)
width	3.66m (12ft)

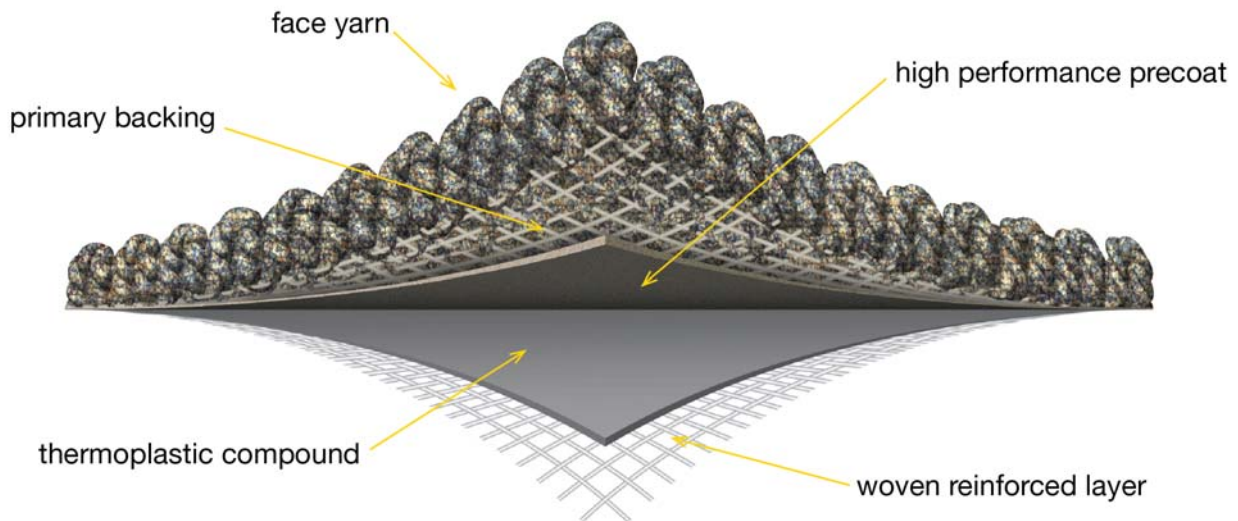

testing	<ul style="list-style-type: none">• Radiant Panel Fire – Class 1 (based on pile construction)• NBS Smoke < 450 (based on pile construction)• TVOCs < 500 micrograms/sqm/hr
antimicrobial	Passes AATCC 174 when installed using Shaw 3600
installation	Shaw 3500, 3600. Direct glue installation only.
performance	<ul style="list-style-type: none">• Superior performance to a 6-foot backing with fewer seams• Excellent pattern match• Lifetime warranty against edge ravel and delamination• Moisture barrier
environmental	<ul style="list-style-type: none">• 20% Recycled Content• Certified Silver Cradle to Cradle by McDonough Braungart Design Chemistry (MBDC)• PVC-free• Optimized for human health and safety• Low VOC's meeting CRI Green Label and Green Label Plus requirements• Lighter weight than traditional high performance broadloom backings• Fully recyclable using Shaw's proprietary dissolution process
warranty	Lifetime Commercial
reclamation	Environmental guarantee: For cradle-to-cradle recycling, call 1800-556-302
online information	To download details on installation, specifications, and warranties online visit www.shawcontractgroup.com.au